

GUILLOTINE WINDOW SYSTEM




Remove barriers from your sight with GUILLOTINE...

Why Guillotine

- ✓ New Generational Approach
- ✓ Modern aesthetic shape
- ✓ Unlimited view
- ✓ Optional choice of colors
- ✓ Various glass using options
- ✓ Various application dimensions



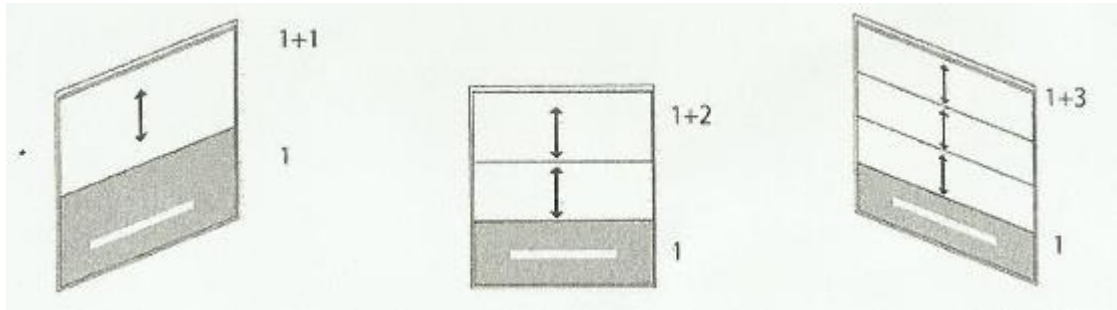

- First glass is fixed and others are mobile
- For 1+1, max. height 2,40 m and width 4,50m
- For 1+2, and 1+3, max. height 3,60m and width again 3,60m.

Features of Guillotine

- ✓ Ease of installation and handling
- ✓ Silent operation
- ✓ Adjustable glass levels
- ✓ Designed to resist high wind pressure and live loads
- ✓ Low maintenance with easy cleaning and glass replacement
- ✓ Safety precautions to prevent possible accidents
- ✓ Button or key control option
- ✓ Double glazing option




Advantages of Guillotine

- ✓ Increasing area of usage
- ✓ Allows to control fresh air level in closed area
- ✓ Protect the people against wind thanks to adjustable glass levels
- ✓ Open and close with minimum effort
- ✓ Fixed panel act as glass balustrade
- ✓ Extremely secure compare with standard glass balcony systems
- ✓ Possible to control motor with USB power source when electricity goes off



Areas of Usage

Café Restaurant Hospital Office Residence Garden House Winter Garden Veranda

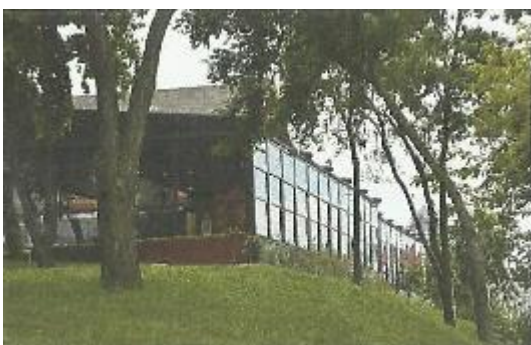

Some Applications





Basic Technical Details

- ✓ Aluminum Profile Post : 9*12 cm
- ✓ Aluminum Profile Upper Box : 12*13 cm
- ✓ Control : Key button or remote control
- ✓ Motor : SOMFY
- ✓ Glass : 8 mm tempered simple glass as standard, 4+4 mm laminated or 5 + 10,5 mm heat insulated tempered glass.
- ✓ Aluminum Profile- Glass Adhesive : 75 kg/cm2 adhesive exclusively developed for PANOCAM/GUILLOTINE.
- ✓ Surface Colors : All RAL and anodized surface colors.

